UTC S8050 NPN EPITAXIAL SILICON TRANSISTOR

LOW VOLTAGE HIGH CURRENT SMALL SIGNAL NPN TRANSISTOR

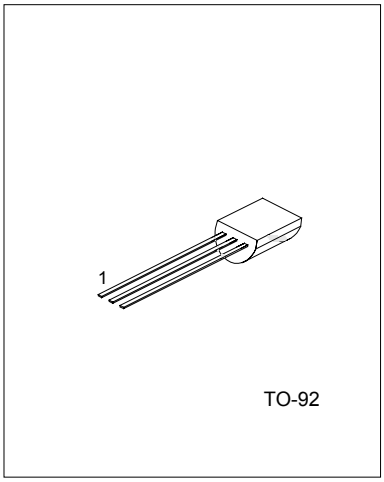

TO-92

1:EMITTER 2:BASE 3: COLLECTOR

DESCRIPTION

The UTC S8050 is a low voltage high current small signal NPN transistor, designed for Class B push-pull audio amplifier and general purpose applications.

FEATURES

*Collector current up to 700mA
*Collector-Emitter voltage up to 20 V
*Complementary to S8550

ABSOLUTE MAXIMUM RATINGS (Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	30	V
Collector-Emitter Voltage	V_{CEO}	20	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Dissipation(Ta=25°C)	Pc	1	W
Collector Current	Ic	700	mA
Junction Temperature	T_j	150	°C
Storage Temperature	T_{STG}	-65 ~ +150	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	BV_{CBO}	I_C=100μA,I_E=0	30			V
Collector-Emitter Breakdown Voltage	BV_{CEO}	I_C=1mA,I_B=0	20			V
Emitter-Base Breakdown Voltage	BV_{EBO}	I_E=100μA,I_C=0	5			V
Collector Cut-Off Current	I_{CBO}	V_{CB}=30V,I_E=0			1	μA
Emitter Cut-Off Current	I_{EBO}	V_{EB}=5V,I_C=0			100	nA
DC Current Gain(note)	h_{FE1}	V_{CE}=1V,I_C=1mA	100			
	h_{FE2}	V_{CE}=1V,I_C=150 mA	120	110	400	
	h_{FE3}	V_{CE}=1V,I_C=500mA	40			
Collector-Emitter Saturation Voltage	V_{CE}(sat)	I_C=500mA,I_B=50mA			0.5	V
Base-Emitter Saturation Voltage	V_{BE}(sat)	I_C=500mA,I_B=50mA			1.2	V
Base-Emitter Saturation Voltage	V_{BE}	V_{CE}=1V,I_C=10mA			1.0	V
Current Gain Bandwidth Product	f_T	V_{CE}=10V,I_C=50mA	100			MHz
Output Capacitance	Cob	V_{CB}=10V,I_E=0 f=1MHz		9.0		pF

CLASSIFICATION OF hFE2

RANK	C	D	E
RANGE	120-200	160-300	280-400

TYPICAL PERFORMANCE CHARACTERISTICS

Fig.1 Static characteristics



Fig.2 DC current Gain



Fig.3 Base-Emitter on Voltage



Fig.4 Saturation voltage



Fig.5 Current gain-bandwidth product



Fig.6 Collector output Capacitance



UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.