

Isc N-Channel MOSFET Transistor

2N7000

• FEATURES

- With TO-92 package
- Low input capacitance and gate charge
- Low gate input resistance
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• APPLICATIONS



- Switching applications
- Load switch
- Power management

• ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{DSS}	Drain-Source Voltage	60	V
V _{GSS}	Gate-Source Voltage	±20	V
I _D	Drain Current-Continuous	200	mA
I _{DM}	Drain Current-Single Pulsed	1.3	A
P _D	Total Dissipation @T _c =25°C	350	mW
T _j	Max. Operating Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55~150	°C

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th(ch-a)}	Channel-to-ambient thermal resistance	357	°C/W

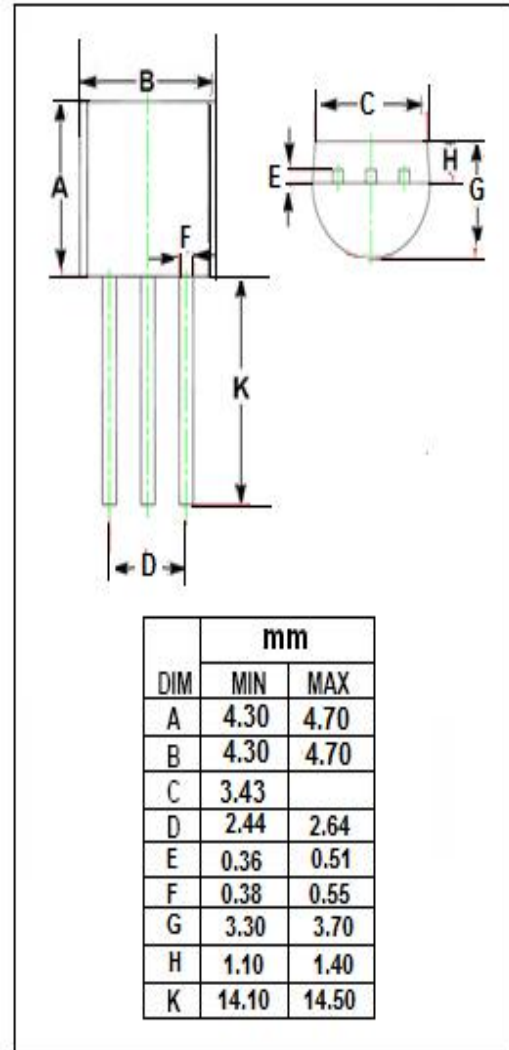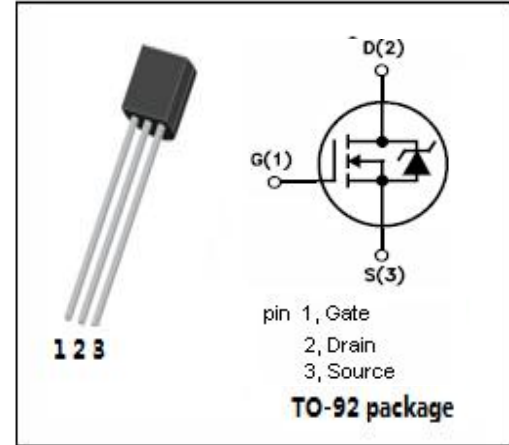

Isc N-Channel MOSFET Transistor

2N7000

ELECTRICAL CHARACTERISTICS

T_C=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V; I _D = 0.01mA	60			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} ; I _D =1mA	0.8		3.0	V
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} = 10V; I _D =0.5A			5	mΩ
I _{GSS}	Gate-Source Leakage Current	V _{GS} = ±15V; V _{DS} = 0V			±0.01	μA
I _{DSS}	Drain-Source Leakage Current	V _{DS} =48V; V _{GS} = 0V; T _C =25°C V _{DS} =48V; V _{GS} = 0V; T _C =125°C			1 1000	μA
V _{SDF}	Diode forward voltage	I _{SD} =0.5A, V _{GS} = 0 V			1.5	V